



Masport[®]
HEATING



LE4000 PROVINCIAL

INBUILT WOOD FIRE

The clean lines of inbuilt LE4000 wood burner provide a discreet, yet stylish focal point for the heart of your home. With the flexibility of installation for masonry or timber framed recesses, and available in 3 fascia options, the LE4000 suits a wide range of homes. An electrically motored fan distributes heat quickly and maintains optimal heat circulation.

masportheating.co.nz



LE4000 PROVINCIAL INBUILT WOOD FIRE

Transform your existing masonry fireplace into a dramatic modern feature.

- ▶ NES, ECan^ and ORC Airshed I clean air approved
- ▶ Substantial heat from a fully finned 6mm steel firebox, triple air combustion system and heat exchanger technology
- ▶ Standard single-speed fan for optimal heat circulation
- ▶ Suitable for masonry and timber framed Zero Clearance (ZC) recessed installations
- ▶ Available in Wide, Slim or Zero Clearance Fascia

^Installations limited to specific regions in Canterbury.



BASE OPTIONS



Fire Only	995903*	995903*
Fascia Only	995904 (Slim), 995906 (Wide)	995905 (ZC)
ZC Box	N.A.	995984
Fire+Fascia	MAW2104 (Slim), MAW2105 (Wide)	MAW2106
Flue Pack	GDFLU001M	GDFLU021M
Fire+Fascia+ Flue Pack	LE4VHTSLIMPACK, LE4VHTWIDEPACK	LE4VHTZCPACK

Finish	Black VHT Paint
Louvre / Grill	Black VHT Paint
Space Heat Output**	Suitable for small to medium homes (2-3 bedrooms)
Fascia Dimensions w x h	Wide 965 x 675 mm Slim 845 x 700 mm ZC 965 x 745 mm

*Comes with factory fitted with fan which must be connected to main power supply while running the fire.


Clearance Specifications

Dimensions and minimum floor protector sizes as per standard AS/NZS 2918:2001

Model	Space Heat Output	Type	Fascia	Type of Floor Protector	Thickness of Floor Protector	Elevation above ground	D	H	W	F	FF	FH	FW	HW	HD
LE4000 Provincial	SML-MED	Insert	Wide	IFP-3	> 50	> 50	417	567	590	101	316	680	965		
		Insert	Slim									700	845	935	345
		Inbuilt	Standard				525	696	715	210	315				

Type of Floor Protectors

IFP-3 Two layers of 16mm thick MICORE I60 & one layer of 6mm fibre cement sheet & tiles

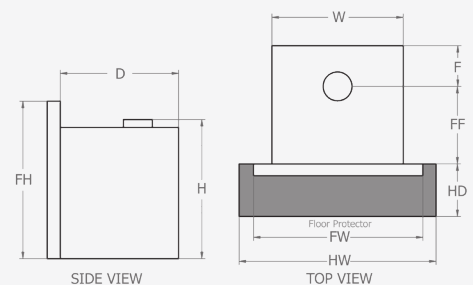

* Refer to the specification sheet for full details of the clearance distances and heat capacity and output.

**Space Heat Output is only a guide based on homes with average insulation, window area, and 2.4m ceiling heights. Differences in these factors, as well as others like, geographical location, layout of the house, living room size, type of windows all play a part in choosing the right model for your heating needs. Consult your dealer or installation contractor for more information.



Glen Dimplex New Zealand Ltd PO Box 58473, Botany, Auckland

Glen Dimplex New Zealand Ltd's policy is one of continuous development. We reserve the right to change size and specifications without notice. For the latest product information and warranty details please refer to www.masportheating.co.nz. Please refer to the installation and operation instructions before having your Masport Wood Fire installed. A full set of these instructions is supplied with each fire.

masportheating.co.nz

Jan 2025